

FURUNO

FISH FINDER

Model

FCV-1900

*See underwater **clearly and accurately**
with incredible high definition echoes*


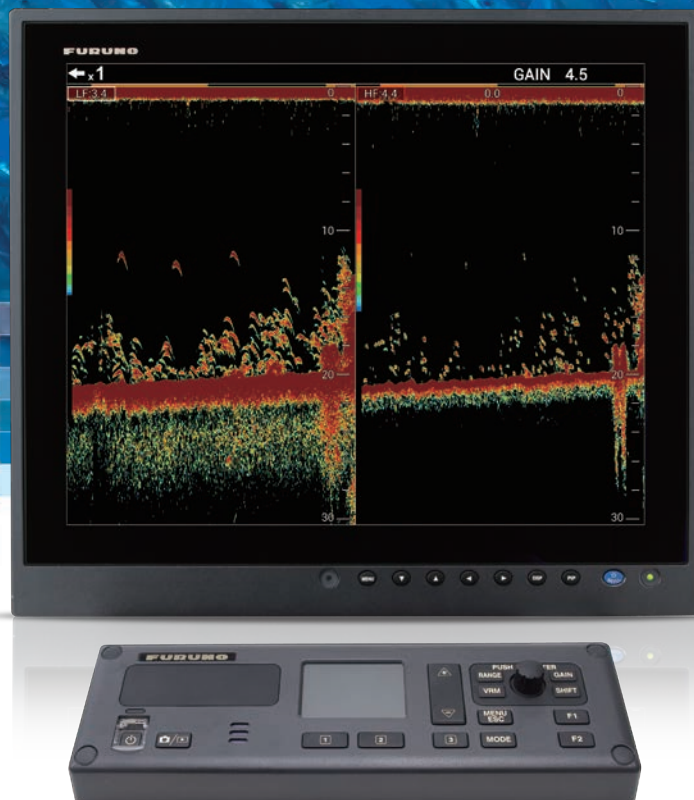


Photo: 19" Marine Display MU-190HD
(Optional supply)



www.furuno.com

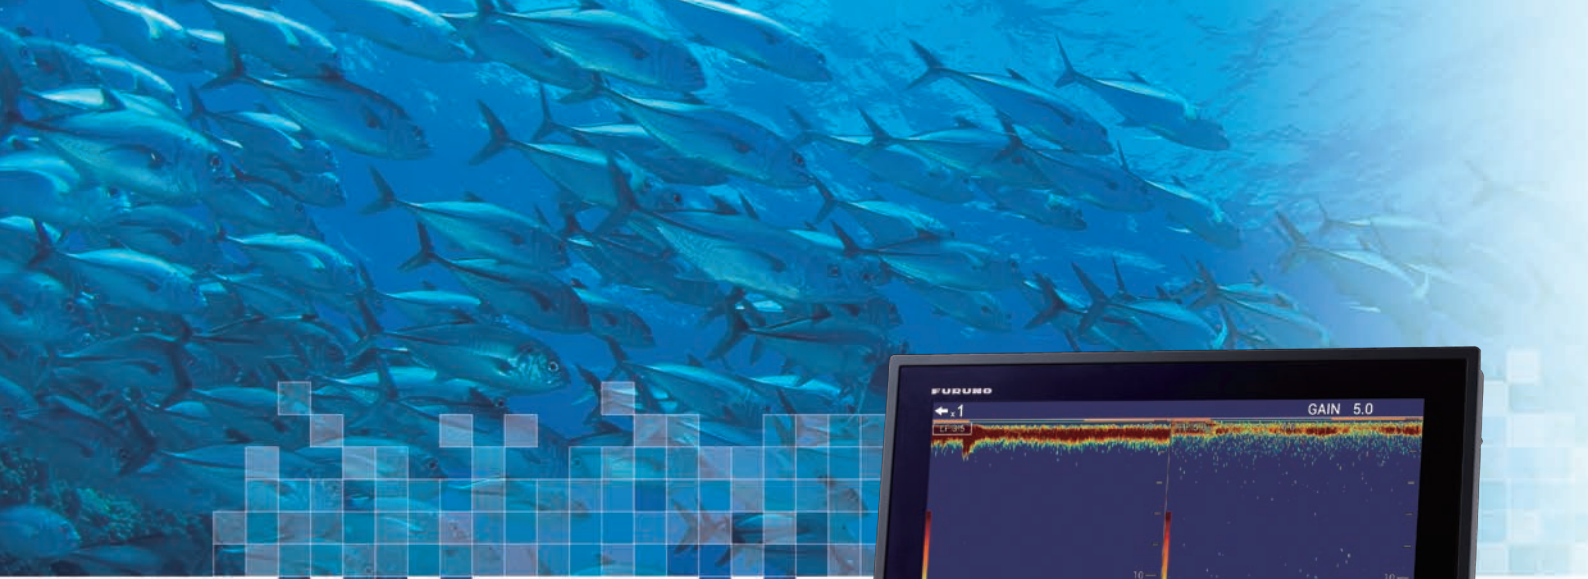

FISH FINDER

Model

FCV-1900

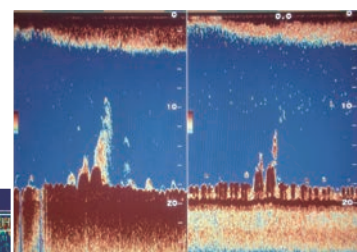


Photo: 19" Marine Display MU-190HD
(Marine Display and Hanger are optional supply)


Increased transmission rate for more details

With a transmission rate that has been increased by up to 1.4 times (200m range), FCV-1900 ensures excellent target separation and clarity.

Same scene captured with previous model




Individual fish

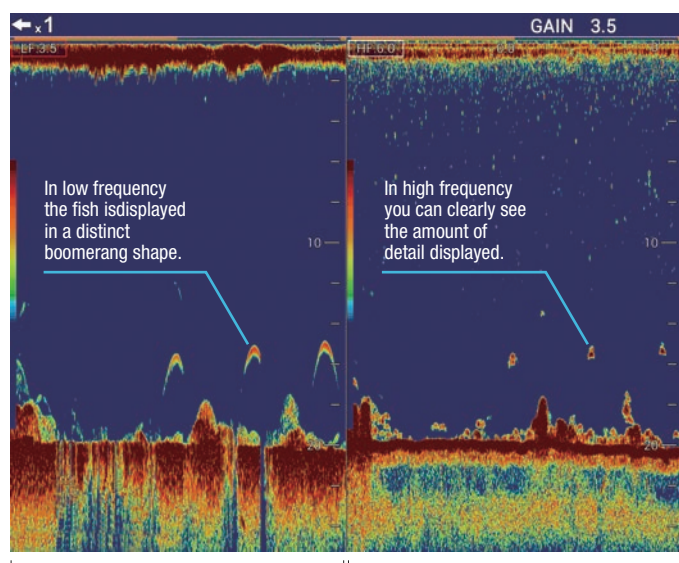

Low Frequency

High Frequency

Fish reef

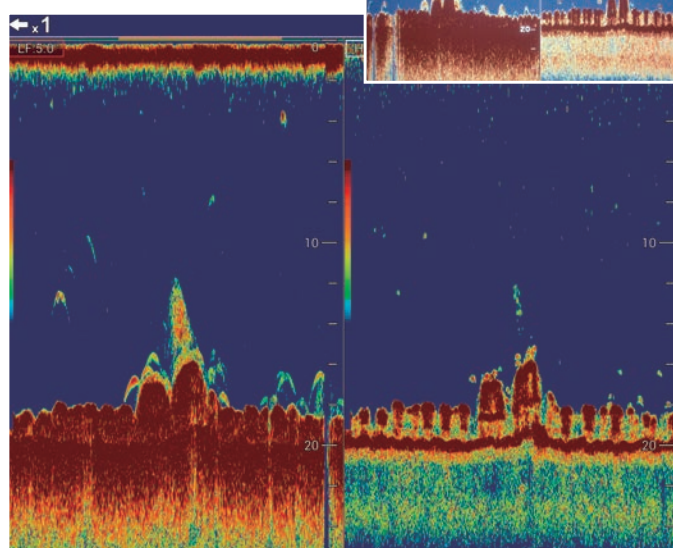

See fish reefs in greater detail

► You can find more information and media by searching for FCV-1900 on FURUNO.com


FCV-1900



Functions for improved efficiency

Display up to four different frequencies

Display up to four different frequencies together in a compact and easy way by connecting a required network fish finder. Since there is no need to install additional displays, this system is especially useful for small vessels.

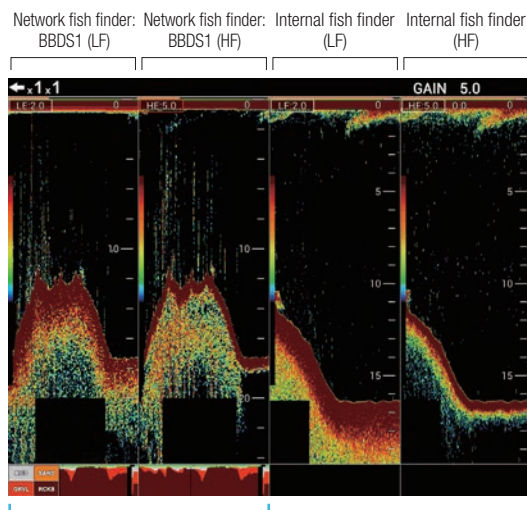


Connect a BBDS1 network fish finder for bottom discrimination function

The bottom discrimination function indicates whether the bottom is composed mainly of rocks, gravel, sand or mud. This information aids in identifying fish species, which can increase efficiency.



Scroll back function

With the press of a button you can activate the scroll back function to instantly review past echoes. Up to two previous screens can be viewed.

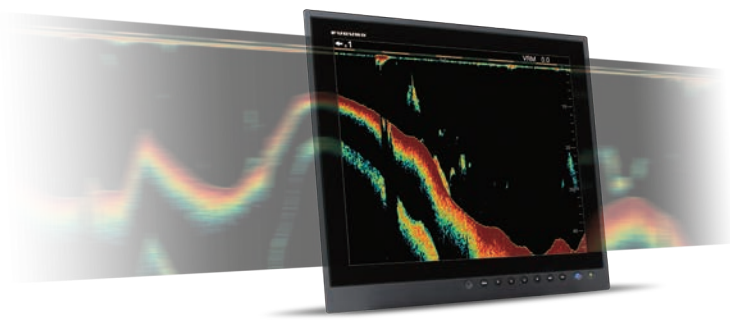

Capture and review videos and screenshots*


Now you can capture screenshots and video when dropping your net or when searching for fish. Captured screenshots and video display position* and time of capture, for simple review. Improve your fishing by comparing fish finder echoes with your resulting catches.

*GPS input required. *Feature coming soon.



Simultaneous gain setting for increased visibility

Display two different gain settings simultaneously for increased visibility in changing water conditions and when changing vessel speed.

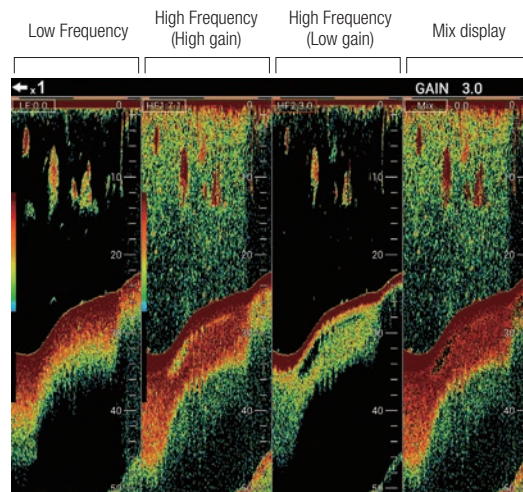

FURUNO Free Synthesizer transceiver for adjustable operating frequency


Retrofitting is made easy. With FFS technology, you can easily replace an FCV-1200L processor unit while utilizing the same transducer for convenient installation.

Improved control unit for simple and intuitive operation

The control unit features a water resistant touch pad that works even when wearing rubber gloves. You can use the touch pad for setting up VRM and TLL in an instant.

Zero Line Rejection

Observe clear echoes from just 3 meters below your vessel with Zero Line Rejection, allowing you to better analyze the water column from near to far.

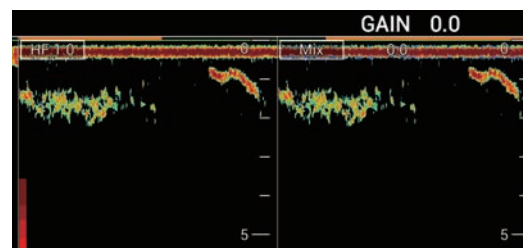

Upgrade to FCV-1900B Hi-Res Fish Finder or FCV-1900G Fish size indicator

By purchasing and installing a software license, you can upgrade your FCV-1900 model to a FCV-1900B Hi-Res Fish Finder* or a FCV-1900G Fish Size Indicator*, both utilizing the latest TruEcho CHIRP™ technology. FCV-1900G offers a precise fish size histogram for accurate estimation of fish size and density of schools of fish. With fish size histogram, targets can be properly evaluated, spelling increased efficiency and profitability. For further details, please contact your local FURUNO national distributor.

*TruEcho CHIRP™ compatible transducer required.

SPECIFICATIONS

1. GENERAL

- 1.1 Transmitted frequency 15 kHz to 200 kHz, Free-synthesize
- 1.2 Output power 1, 2 or 3 kW rms
- 1.3 Transmitting rate 10 to 2700 pulse/min
(5 to 3000 mm range, normal mode)
- 1.4 Transmitting mode Standard mode only
- 1.5 Pulselength 0.05 to 5 ms
- 1.6 External monitor (required specifications)
Display resolution XGA (1024x768), SXGA (1280x1024), SXGA (1024x1280), Landscape XGA (1024x768), Landscape SXGA (1280x1024), Portrait SXGA (1024x1280)

2. PROCESSOR UNIT

- 2.1 Color indication
Echo color 8, 16 or 64 colors according to echo intensity
Back color Select from 5 colors
- 2.2 Hue 7 steps (standard, Hue 1 to 5, customized)
- 2.3 Echo display mode Single mode (high/low frequency), Dual-frequency, Zoom, User 1/2
User 1/2 available to use mixture, multi-gain, telesounder and external sounder display
- 2.4 Zoom display Bottom-lock expansion, Bottom zoom, Marker zoom, Discrimination zoom
- 2.5 Depth range 5 to 3000 m
- 2.6 Range shift 2000 m max.
- 2.7 Expansion range 5 to 200 m
- 2.8 Display advanced speed 6 steps (Lines/TX: Freeze, 1/4, 1/2, 1/1, 2/1, 4/1)
- 2.9 Data recording Echo display and measured data can be recorded to internal memory
- 2.10 Language Chinese, Danish, English, French, Japanese, Korean, Russian, Spanish, Norwegian

3. INTERFACE

- 3.1 Number of port
NMEA 3 ports, NMEA V1.5/2.0/3.0
LAN 1 port, Ethernet 100Base-TX (HUB required)
CIF 1 port
Net sonde 1 port, (sonde marker/ sonde KP)
Video signal 1 port, HDMI type-D
External KP 1 port
Temperature sensor 1 port
USB 1 port, USB2.0
(specified monitor brilliance control available)

3.2 Data sentences

- Input GGA, GLL, GNS, MTW, VHW, VTG
Output DBS, DBT, DPT, MTW, TLL

3.3 Output proprietary sentences

- PFEC afl, bcd, dat, mrk

4. POWER SUPPLY

- 4.1 Processor unit 12-24 VDC: 8.3-3.9 A
- Rectifier (RU-1746B-2, option) 100/110/115/220/230 VAC, 1 phase, 50/60 Hz
- AC/DC power supply unit 100-115/200-230 VAC, 1 phase, 50-60 Hz
(PR-240, option)

5. ENVIRONMENTAL CONDITIONS

- 5.1 Ambient temperature -15°C to +55°C
- 5.2 Relative humidity 95% or less at +40°C
- 5.3 Degree of protection IP22
- 5.4 Vibration IEC 60945 Ed.4

EQUIPMENT LIST

Standard


1. Processor Unit (FCV-1901) x1
2. Control Unit (FCV-1902) x1
3. Spare parts, Installation materials

Option

Transducer, Thru-hull pipe, Interface Unit (FCV-1903), Ethernet HUB, Junction box, Booster box, Temperature sensor, AC/DC power supply unit, Rectifier, Installation material, Cable assembly, Cable (for transducer extension)


Processor Unit

FCV-1901
10.2 kg 22.5 lb

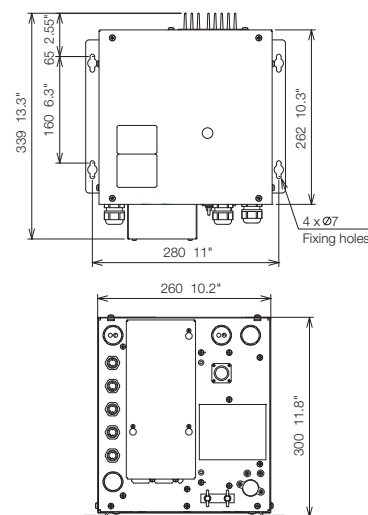


Control Unit

FCV-1902
1.1 kg 2.4 lb

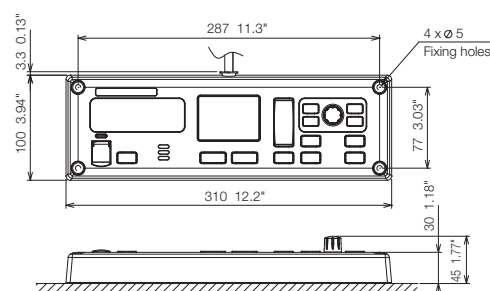

Interconnection Diagram

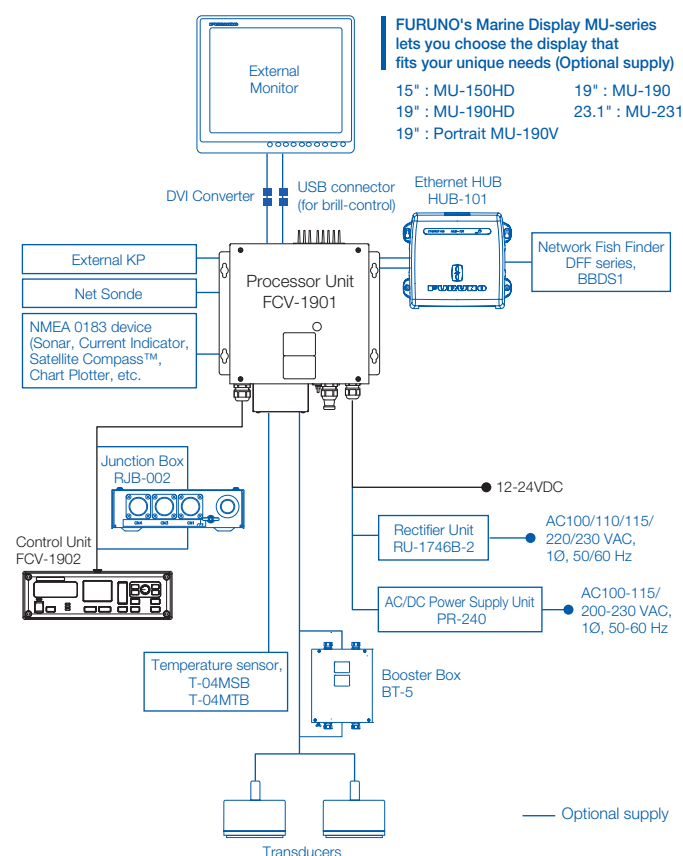

Beware of similar products

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.

Nishinomiya, Hyogo, Japan
www.furuno.com

FURUNO U.S.A., INC.

Camas, Washington, U.S.A.
www.furunousa.com

FURUNO (UK) LIMITED

Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO FRANCE S.A.S.

Bordeaux-Mérignac, France
www.furuno.fr

FURUNO ITALIA S.R.L.

Gatteo Mare, Italy
www.furuno.it

FURUNO ESPAÑA S.A.

Madrid, Spain
www.furuno.es

FURUNO DANMARK A/S

Hvidovre, Denmark
www.furuno.dk

FURUNO NORGE A/S

Ålesund, Norway
www.furuno.no

FURUNO SVERIGE AB

Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY

Espoo, Finland
www.furuno.fi

FURUNO POLSKA Sp. z o.o.

Gdynia, Poland
www.furuno.pl

FURUNO EURUS LLC

St. Petersburg, Russian Federation
www.furuno.com.ru

FURUNO SINGAPORE

Singapore
www.rico.com.sg

FURUNO DEUTSCHLAND GmbH

Rellingen, Germany
www.furuno.de

FURUNO HELLAS S.A.

Piraeus, Greece
www.furuno.gr

FURUNO (CYPRUS) LTD

Limassol, Cyprus
www.furuno.com.cy

FURUNO SHANGHAI CO., LTD.

Shanghai, China
www.furuno.com/cn

15121SS Printed in Japan
Catalogue No. E-424a